


NOTES:

1. Cable is 22AWG twisted pair with overall shield. Shield is connected to pin 18 at both ends.
 ** wire is made from four individual #22AWG wires in parallel TX+/TX- and RX+/RX- must be on twisted pairings.
2. Connectors are Conxall 13282-18SG-32 for J1 and J2
3. Length of cable is partnumber"-XXX" in feet. For example, 32998-003 is a 3 ft cable.
4. Cable shall be constructed to be water tight.
5. Cable to be identified by part number and dash number using UV resistant ink and materials.

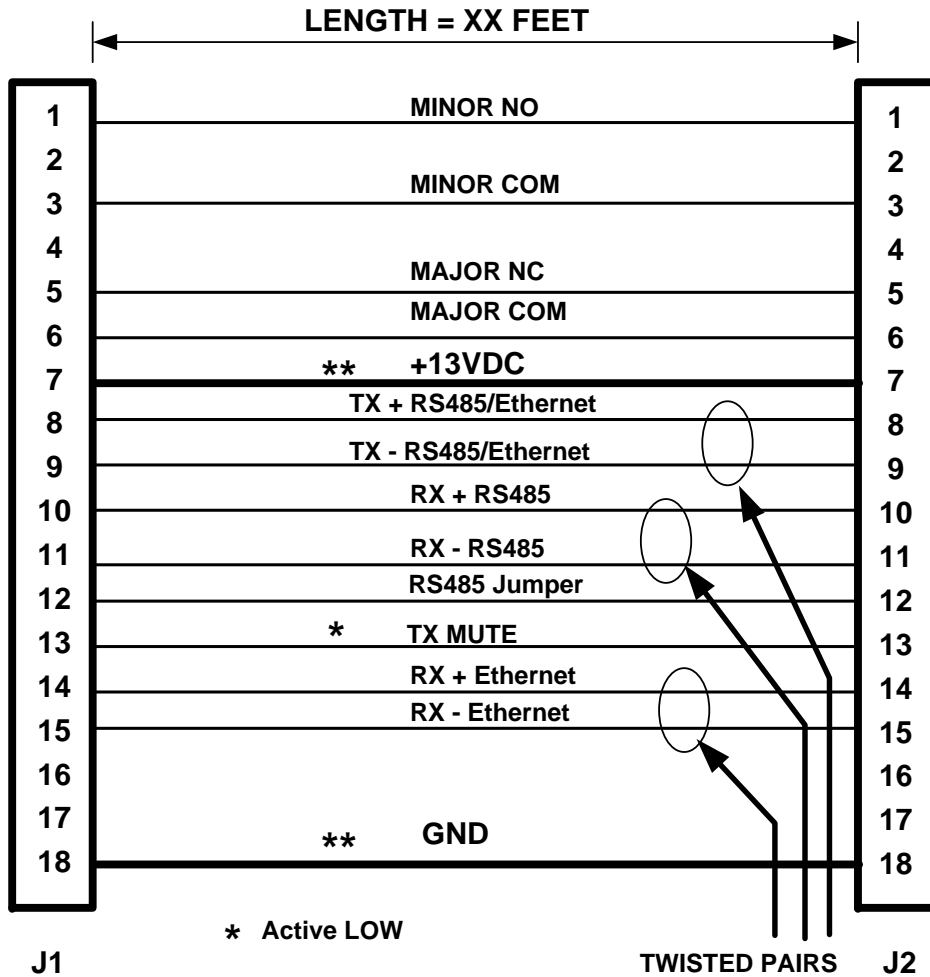

NOTE: TX and RX are from the ODU perspective

ANACOM INC.		
1996 Lundy Ave., San Jose, CA 95131		
Title CABLE, PS to ODU, ETHERNET/RS485		
Size A	Document Number 32998	Rev 3
Date:	29 NOV 2012	Sheet 1 of 1