NOTES:

1. ASSEMBLE PER ANACOM WORKMANSHIPSTANDARD 000003
2. P2: SOLDER WIRES & COVER WITH HEAT SHRINK TUBING.
3. MAKE LABEL OF HEAT SHRINK TUBING, MARK WITH PART NO (32999-XXX) IN CLEAR, HIGH CONTRAST COLOR WHERE XXX IS LENGTH IN FEET.

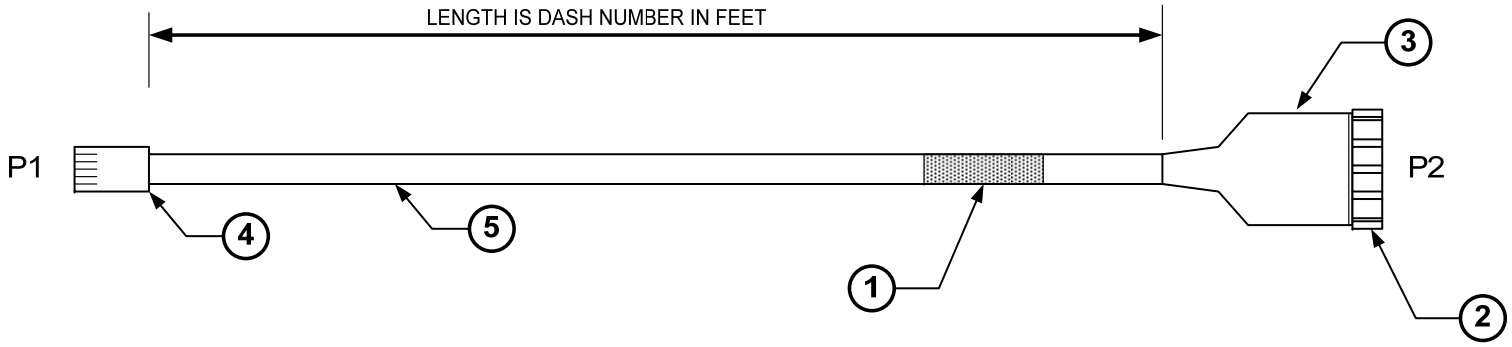

WIRE TABLE				
P1	P2	COLOR	SIGNAL	
1	8	ORANGE/WHITE	TX +	Twisted pair
2	9	ORANGE	TX -	
3	15	GREEN/WHITE	RX +	Twisted pair
6	14	GREEN	RX -	

ITEM	DESCRIPTION	SIZE	PART NUMBER	QUANTITY
8				
7				
6				
5	CABLE, ETHERNET CAT-5			1
4	RJ-45 CONNECTOR			1
3	TUBING, HEAT SHRINK			AS NEEDED
2	CONNECTOR, CABLE MOUNT, 18 PIN, FEMALE		13282-18SG-32	1
1	LABEL			1

ANACOM INC.
1996 LUNDY AVE., SAN JOSE, CA 95131

Title: **CABLE, ETHERNET**

Size	Document Number	Rev
B	32999	2

Date: 11 JAN 2010 Sheet 1 of 1